

SOLUTIONS FOR INDUSTRIAL ECOSYSTEMS

SIMPLE STEP  **MIGHTY MOVE**

ENRICH YOUR WORKING LIFE.



SVĚT HLINÍKU

Hliník na míru, kvalita bez kompromisů
MiroTechMont, s.r.o.



SVĚT HLINÍKU
Hliník na míru, kvalita bez kompromisu
MiroTechMont, s.r.o.

DOLLY CHECK

**MATERIAL FLOW IS SIMPLE:
THE RIGHT PRODUCT AT THE RIGHT TIME IN THE RIGHT
QUANTITY WITH THE RIGHT QUALITY IN THE RIGHT PLACE.**

**THE FOLLOWING INFORMATION WILL HELP YOU SELECT THE
MOST SUITABLE WHEELED FRAME.**





SVĚT HLINÍKU

Hliník na míru, kvalita bez kompromisu
MiroTechMont, s.r.o.

QUALITY WHEELS FROM BLICKLE GERMANY

All **FATH** dolly rollers are fitted with high-quality wheels manufactured by Blickle, Germany. These wheels are durable, precisely engineered, and proven over years of reliable use. A wide range of wheel types is available to suit virtually any application or operating environment.

Depending on your specific requirements, you can choose options such as particularly quiet-running wheels, highly anti-slip designs, non-marking materials, or ESD-safe wheels for your dollies.

An additional advantage: all **FATH** rollers are securely and rigidly mounted to the dollies using a single central fixing screw, ensuring excellent stability and reliability.



DOLLY

DOLLIES FOR ALL OCCASIONS



ALL-ROUNDER



Various configurations for a **wide range of applications**

SECURE



With lateral guide for **secure hold** of container without composite base

DURABLE



Extra large, designed for up to **500 kg payload**

TEAM PLAYER



With tow bar and coupling for use in **towing trains**


Dimensions (mm)	600 x 400	600 x 400	800 x 600	600 x 400 with tow bar and coupling
Load capacity (kg)	250	250	500	250
Availability	yes	yes	yes	yes
Suitable for adapter pallets	yes	yes	yes	yes

DOLLY

DOLLIES FOR ALL OCCASIONS



DOUBLE-DECKER



Ergonomic double-decker dolly with double material capacity

PALLET LID



Highly efficient space utilization in logistics

SPACE-SAVER



COMING SOON

Space-saving dimensions for special solutions

Dimensions (mm)	600 x 400	1200 x 800	400 x 400
Load capacity (kg)	250	250	250
Availability	yes	yes	no
Suitable for adapter pallets	yes	yes	yes

DOLLY

ALL-ROUNDER

The dolly for every situation.

Our **all-rounder** offers various configurations for a wide range of applications:

- Easy to steer rollers, with 4 swivel castors for changing direction
- Tracking stability with 2 swivel castors and 2 fixed castors
- Roller version in polypropylene* (hard-wearing and abrasion-resistant), solid rubber (low-noise and vibration-damping), ESD-suitable or TPE rubber version (low rolling and swivel resistance)


**the PP has similar properties to that used in common PA rollers*



DOLLY

ALL-ROUNDER

The dolly for every situation.

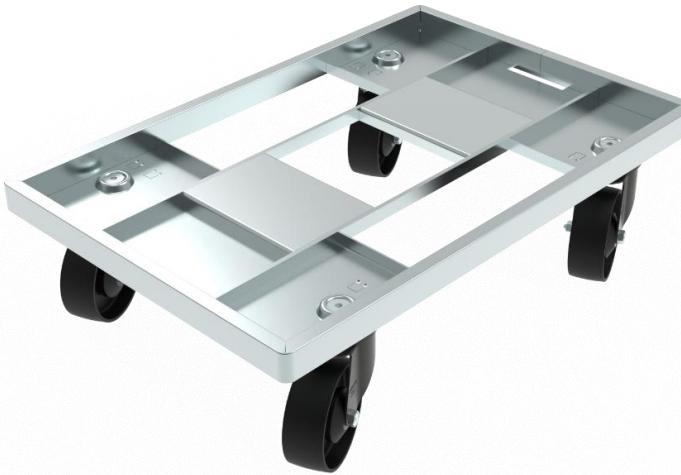

also available as an ESD variant

pA	Part no.	Description:	USP
151586	0207D1F2S2WDS02	2 swivel castors and 2 fixed castors, PP* black	Easy-to-steer design with very low rolling resistance, abrasion-resistant and durable.
151390	0207D1F2S2WD004	2 swivel castors and 2 fixed castors, PP* black ESD	Track-accurate, robust design for use in ESD areas.
160082	0207D1SF2S2WDS03	2 swivel castors, PP* black, 2 fixed castors TP	Track-keeping design with very low rolling resistance, abrasion-resistant and durable.
160128	0207D1F2S2WDS04	2 swivel castors, PP* ESD, 2 fixed castors TP ESD	Track-accurate design for a wide range of applications in the ESD areas.
160129	0207D1F2S2WDS03	2 swivel castors solid rubber gray, 2 fixed castors TP	Track-keeping design for a wide range of applications, vibration-damping and shock-resistant. Gray version for vulnerable floors.
151394	0207D1SS4WDS04	4 swivel castors, PP* black ESD	Lightweight, robust design for use in ESD areas.
151748	0207D1SS4WDS02	4 swivel castors, PP* black	Easy-to-steer design with very low rolling resistance, abrasion-resistant and durable.
160037	0207D1SS4WDS03	4 swivel castors, solid rubber gray	Easy-to-steer design with solid rubber tires, vibration-damping and shock-resistant. Gray version for vulnerable floors.
161616	0207D1SF2S2WDS05	2 swivel castors and 2 fixed castors, TPE	Low-noise and non-marking thermoplastic rubber elastomers ensure low resistance to rolling and swiveling.

*the PP has similar properties to that used in common PA rollers



DOLLY




SECURE

The secure dolly is ready for all accessories.

Version with side plates (for flat-bottom containers): 

- Designed for containers without a deep-drawn base
- Ideal for intralogistics transport of flat-bottomed crates
- Side plates are firmly welded to the long sides of the dolly
- Securely position and hold containers in place
- Prevent slipping or tipping, even on uneven surfaces

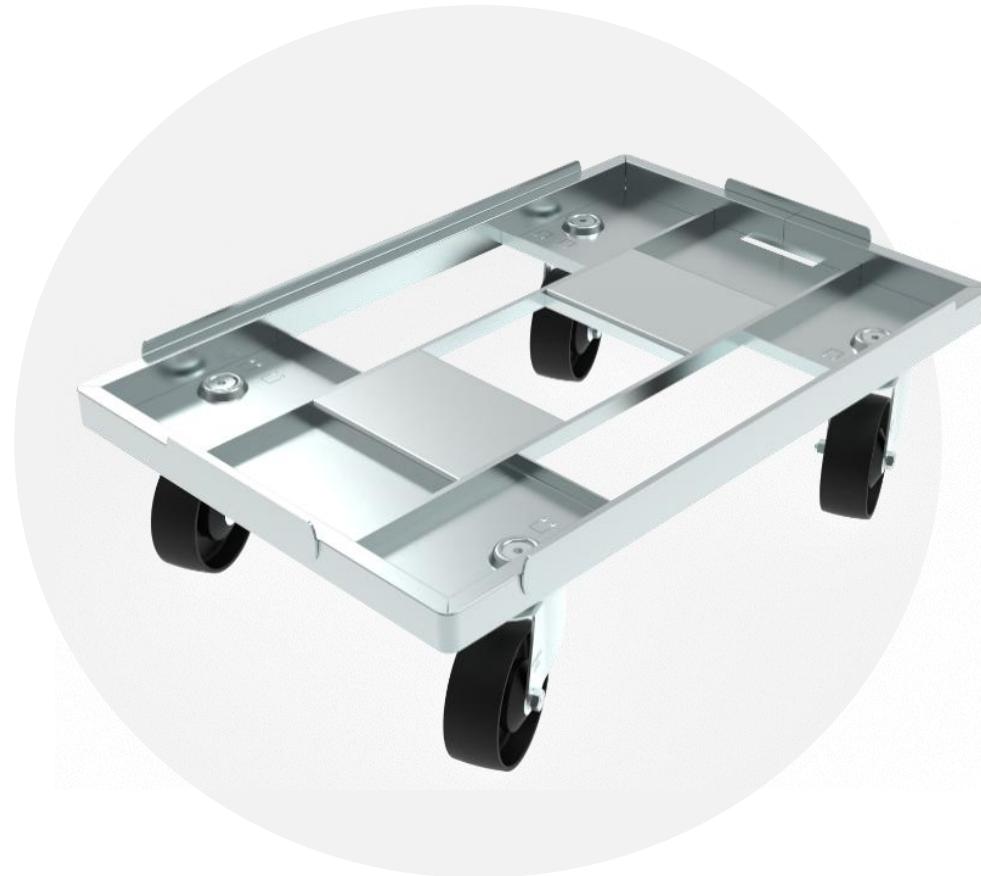

DOLLY

pA	Part no.	Description:	USP
150302	0207D06004001S01	2 swivel castors and 2 fixed castors, PP ESD	Lightweight, robust design for use in ESD areas / stackable when empty
167145	0207D06004001S03	4 swivel castors	Easy-to-steer, robust design / stackable when empty




DURABLE

The durable dolly for heavy-duty tasks.

Extra-large version for Euro containers. 

1 piece 800 x 600 mm / 2 pieces 400 x 600 mm /
4 pieces 300 x 400 mm

- 800 x 600 mm mounting surface
- Up to 500 kg payload (with 5 wheels)
- Roller design is freely configurable
- ESD version available

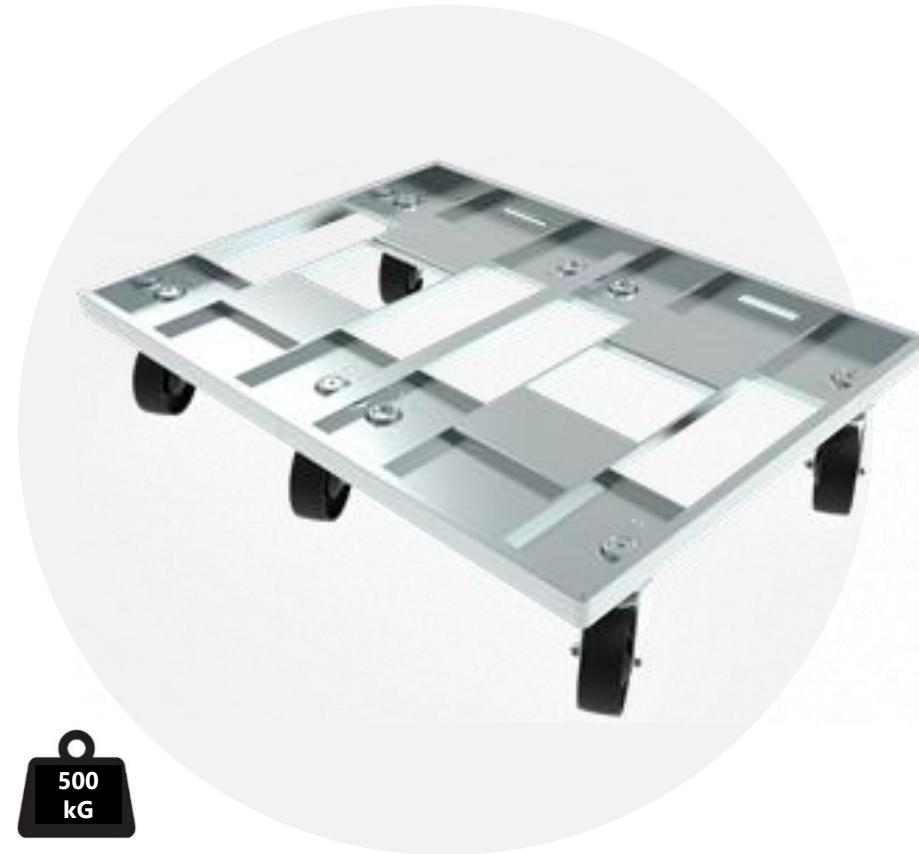

DOLLY

pA	Part no.	Description:	USP
 162093	0207D08006001	3 swivel castors and 2 fixed castors / 5 swivel castors, PP ESD	For SLCs / Euro containers and 1/2 pallets / Stackable when empty / Available in ESD version

TEAM PLAYER

Tow bar system suitable for towing trains.

Towing train version:



- Coupling integrated on the underside of the dolly
- No protruding parts for safe handling
- Fold-out tow bar for use when required
- Automatic return to vertical position via spring mechanism
- Space-saving storage when not in use
- Suitable for safe transport on adapter pallets




DOLLY



DOUBLE-DECKER

Ergonomic double-decker dolly with double material capacity.

- **Double-decker design** - for two SLC 600 x 400 mm containers
- 4 swivel castors - smooth and precise maneuverability
- Robust steel construction - durable, industrial-grade
- ESD version available

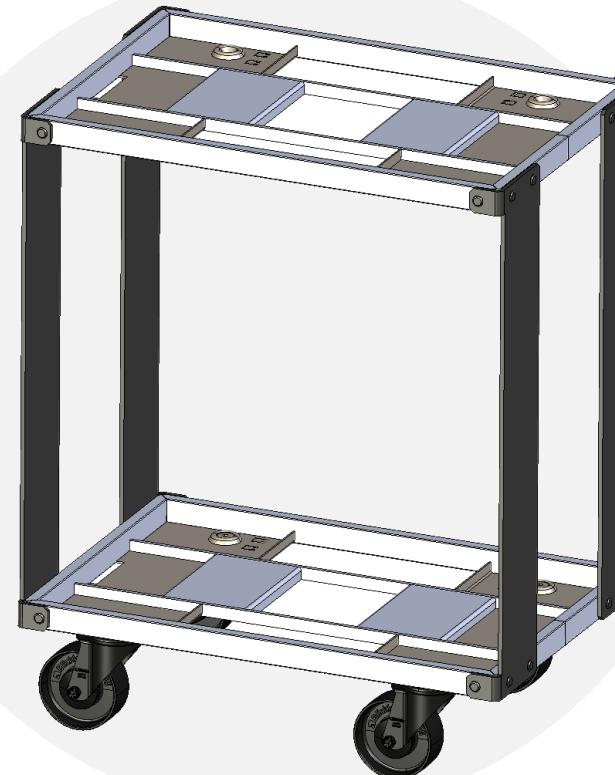

DOLLY



pA	Part no.	Description:	USP
 171675	0207DD1SS4WDS06	Double-decker Dolly for SLC 600 x 400 mm, with 4 swivel castors, PP black, ESD	Ergonomic design / Double material capacity / Available in ESD version

PALLET LID

Maximize storage and efficiency.

- Size: Euro-standard 1200 × 800 mm, optimized for Euro pallets.
- Built-in ratchet strap mechanism with hooks for quick securing.
- Durable, lightweight PP plastic construction – compatible with replaceable straps.
- Eco-friendly solution: reduces the need for stretch wrap.



DOLLY



SPACE-SAVER

Space-saving

As a special solution for use
with 400 x 400 mm Euroboxes.




COMING
SOON

pA	Part no.	Description:	USP
xxx	Other version	2 swivel castors and 2 fixed castors	Compact design / stackable when empty

DOLLY




CUSTOMER SOLUTIONS

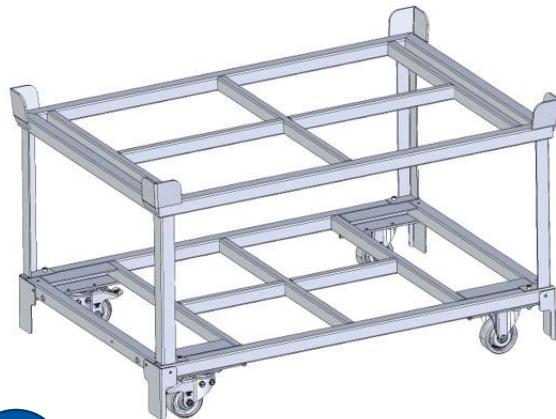


1.*

The products are placed on Euro pallets at an ergonomic height – no need to constantly bend or lift.

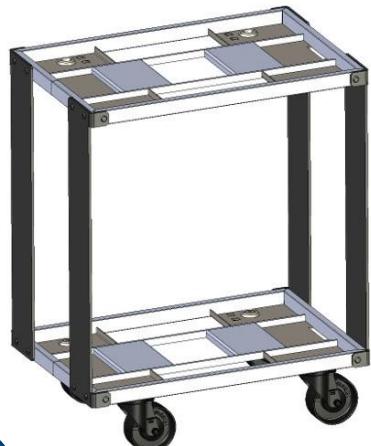

2.

The upper level is used for removing and inserting products, the lower level for picking up empty or full KLTs – for an ergonomically optimized workstation design.

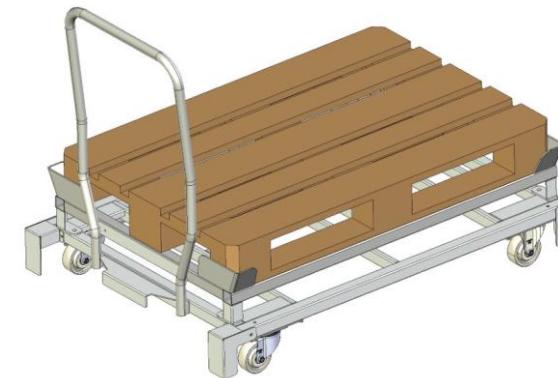

3.

Pallets or lattice box handling made easy: Provision of assembly goods via pallet dolly with push bar – completely without hand pallet trucks.

**AGV-compatible*



DOLLY



LET'S GET STARTED
TOGETHER!